



ARTIBİR MAKİNA JUNYA ÜRÜN KATALOĞU

Artıbirmakina olarak Junya cam yıkama makinalarında sizlere çözüm odaklı gelişimler sunuyoruz.

0533 466 55 40

Hemen
Bilgi Al





Official Website
官方网站



佛山市顺德区骏亚机械有限公司

地址：广东省佛山市顺德区伦教世龙大道16号
电话：0757-2788 9111 传真：0757-2362 2255 邮箱：junyajixie@163.com

FOSHAN SHUNDE JUNYA MACHINERY CO., LTD

Add: No. 16, Shilong Road, Lunjiao, Shunde, Foshan, Guangdong, China
Tel:+86-757-2788 9111 Fax:+86-757-2362 2255 E-mail: junyajixie@163.com

www.chinajunya.com 中文域名：www.骏亚.com

本公司保留产品设计与规格改进权利，届时恕不另行通知，所有资料经过仔细核对，以求准确，如有印刷错误产生失误，本公司不承担因此产生的后果，印刷过程中可能令资料和实物有轻微差别，请以实物为准，本公司保留最终解释权。

Junya reserves the right of improving product design and product specifications without notice. All materials are carefully checked to ensure correction. If happens printing errors, Junya will not assume the consequences. Printing process may make slight difference between materials and actual products. Please be subject to the actual products. Junya reserves final interpretation.



中国骏亚 | 玻璃清洗设备专业生产商
GLASS WASHING MACHINE SPECIALIST

2021

COMPANY INTRODUCTION

公司简介

以自动化建设标准化
以标准化推动品牌升级

Build up standardization with Automation
promote brand upgrades With standardization

佛山市顺德区骏亚机械有限公司（中国骏亚）是一家以玻璃清洗机为主导，集开发、制造、销售于一体的专业厂家。通过全体员工数年的共同努力，把骏亚玻璃清洗机打造成为行业中有代表性的品牌。

主导产品现已成为行业中的精品，是玻璃生产厂家及玻璃机械生产厂家首选配套设备。骏亚以满足玻璃深加工厂家需要为己任，凭借自身的技术研发力量，并结合国内外先进技术制造出的高科技，高精度，高效率的玻璃深加工设备。好的产品需要专业出色的服务，骏亚在发展提升产品质量的同时，建立了一支完善的销售队伍，成员均由技术经验丰富，表达能力优秀，执行能力过硬的年轻人组成，熟练售前操作人员培训，集中现场安装调试，售后跟踪一条龙服务流程，为客户生产提供了有力的保障。

骏亚将继续努力研发先进技术，建立更完善的服务团队，回报客户的热情、支持，携手共创美好生活。

Foshan Shunde Junya Machinery Co., Ltd (China Junya) is a professional manufacturer, focused on developing, manufacturing and selling glass washing and drying machine. Junya has become one of the representative brand in the glass industry through all staff's efforts in many years.

Junya main machines have become the typical products in the glass industry, which are the preferred products of glass manufacturers and glass machinery manufacturers. Junya is dedicated to satisfy the needs of glass deep processing manufactures. Junya produces machines in high-tech, high-precision and high-efficiency by combing our own and other domestic and abroad advanced technologies. During develop and improve good quality machine, Junya built one sales team with rich technical experience, outstanding communication skills and execution power. We can provide strong supports to our customers by operator training, machine installation and testing on site, after-sales tracing service.

We will continue to research advanced technology, set up better service team to pay back customers' support, and enjoy wonderful life together.



PUBLIC WELFARE

公益事业

关爱环境，共筑低碳生活
Common Well Eco-friendly Spirit

我们是地球的公民，
地球是我们共同生活的家园，
每一片绿色带来干净的空气，
每一片绿色带来舒适的环境。

We are citizens of the earth.
The earth is our common home.
Every piece of the green brings clean air;
Every piece of the green
brings comfortable environment.

骏亚人和蓝天有个约定：

种一片心愿，献一份爱心，
尽一份社会责任。

Junya people has an promise with the blue sky:
plant a wish, offer a love
and do a soical responsibility



ENTERPRISE CULTURE

企业文化



务实：立足之本

以人为本，以客为先，兢兢业业，脚踏实地。在市场竞争中
寻求企业发展与项目开发的适宜之路，以产品和服务创造价值，
提升公司的市场竞争力。

Base: People-oriented

People-oriented, Customer first and Pragmatic. We manage to
pave a way appropriate for corporate and project
development. Besides,we enhance our competitiveness
through creating values on both our products and services
which is necessary in this competitive edge.

卓越：追求之境

志向远大，目标明确，追求卓越，永无止境，超越自我是骏
亚孜孜以求的目标，更是公司赢得竞争优势的精神动力。

Excellence: Pursuit

Junya always lays strong emphasis on a far-visions view, a
clear goal, and pursuit of excellence. Diligence, the objective of
Junya, becomes the essence for Junya to be more
advantageous and competitive.

规范：经营之道

规范管理，诚信经营，循法尚德，回馈社会。建立健全的公司
管理结构，运行机制与业务流程，秉持专业的精神和敬业的作
风，认真履行一个企业公民的社会责任，赢得市场的肯定。

Feature: Business Management

Junya features in standardized management, obeying the
laws, observing moral principles and making contributions to
the society with integrity. Junya has established a sound
managerial structure, operation mechanism and business
process. It wins the trust of the market for its professionalism,
dedication and social responsibility as a citizen.

JUNYA MISSION

骏亚使命

创全球知名品牌 为用户提供更优质的产品

Create A World-renowned Brand To Provide
Users With Better Products

MARKETING NETWORK

销售网络

创造全球化品牌

骏亚紧扣互联网时代的需求适应未来发展，掌控专利标准的话语权，进一步发展全球营销网络创造更多的用户资源。同时，以“三位一体”的本土化模式整合全球研发、制造、营销资源，创造全球化品牌。骏亚在全球市场有强大的市场营销网络优势，并与互联网进行充分的融合，以“零距离下的虚实网融合”创出第一时间满足用户第一需求的竞争力。“虚网”指互联网，通过网络形成用户黏度；“实网”指营销网、物流网、服务网，第一时间送达用户满意。通过国外的渠道销售骏亚产品，形成了资源互换，加快了骏亚进军世界市场的步伐。

Create A Global Brand

Junya is closely linked to needs of Internet times to adapt development in future, and controls the discourse power of the patent standard. At the same time, Junya integrates global R&D, manufacturer and marketing resource to create a global brand in the localization mode of "trinity". Junya has a strong marketing network advantage in global market and fully connected with Internet. Through "no distance connection", with visional network and actual network", Junya creates competitive strength of meeting customers' most urgent needs at the soonest time. "Visional Network" means Internet; through Internet, Junya finds and connects with customers. "Actual Network" means marketing network, logistics network and service network; through them, Junya meets customers' needs at the soonest time.

目标和使命

建立世界先进水平的技术研发机构以及先进的资源整合中心，整合利用全球优势资源，为骏亚在全球的发展服务，支持企业的全球化的品牌战略。

Target And Mission

Junya research institute common mission is to establish a world advanced technical R&D institution as well as resource integration centre which can provide Junya's development service in the world, and can support Junya's global brand strategy. Junya research institute mission is "to provide core technical support for Junya companies to create a global well-known brand."

CONSTANTLY INNOVATION


匠心制造 创新不止

创新不止-做高品质玻璃清洗机供应商

Constantly innovation-Be high quality glass washing machine manufacturer

骏亚以做高品质玻璃清洗机供应商为目标,坚持技术创新,不断满足客户需求。以更高品质呈现作为企业传承基因,不断完善工艺流程,不断强化价值供应链的研发生产细节,在产品设备的每一道工序上严格要求、严格把关,注重细节、忠于品质。

Junya aims to be manufacturer of high-quality glass washing machine. Junya is insisting on technical innovation and constantly meeting customers' needs. We are improving the production process, caring about the details of production.

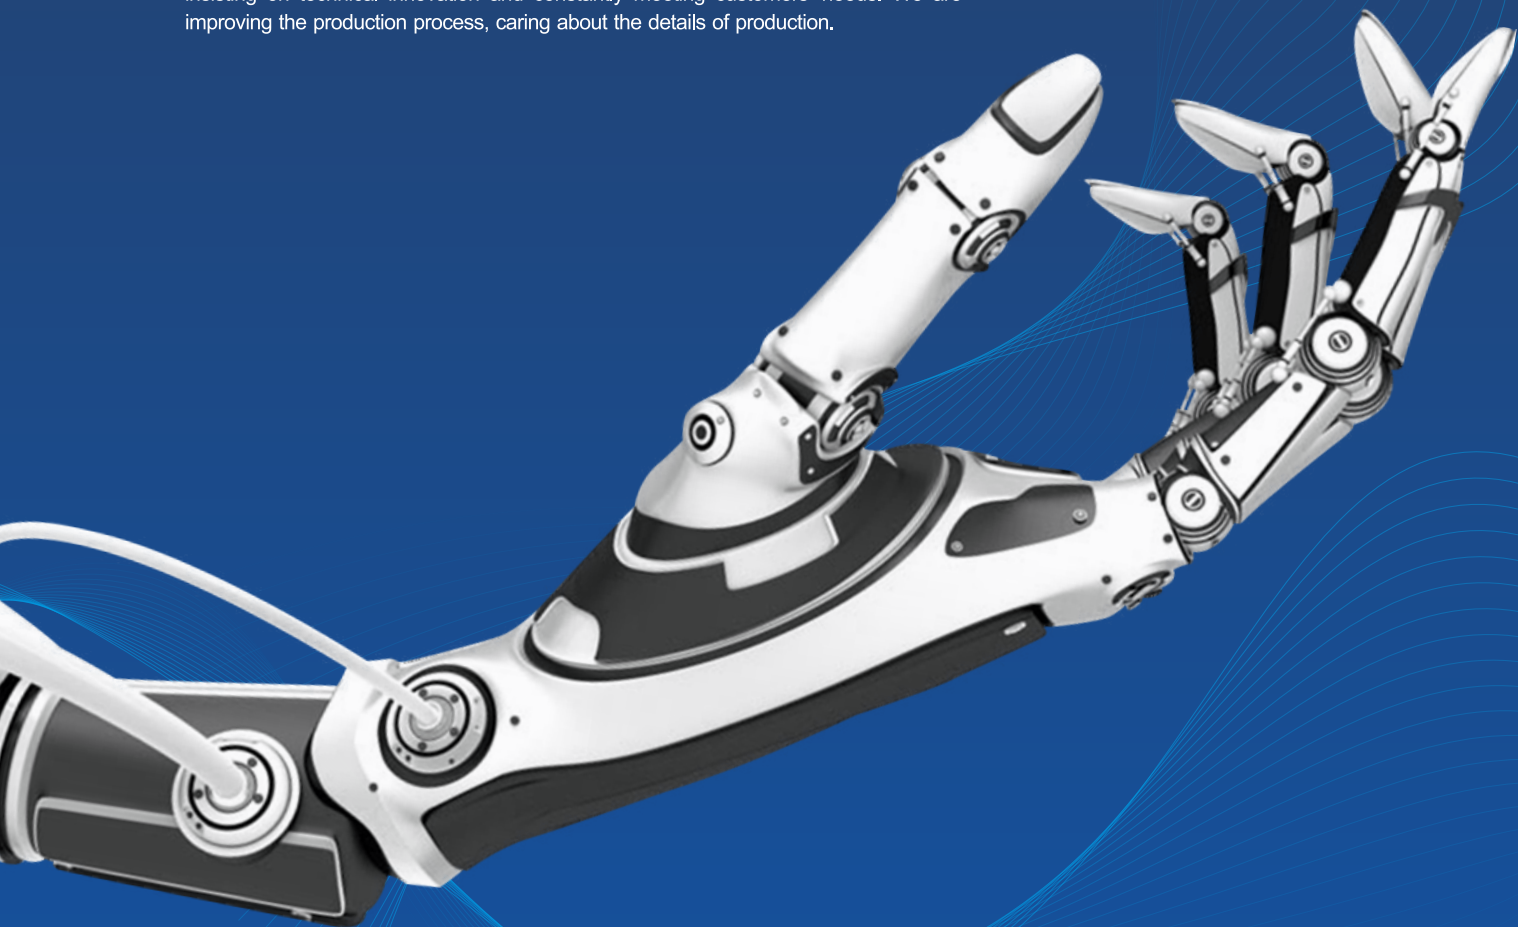

值得信赖-众多品牌供应商支持

Worthy of trust- Win numerous supports from famous brand suppliers

广大合作伙伴的支持,是对骏亚品牌的认可,对技术、品质以及服务的信赖,我们坚定地守护品牌的责任和承诺。多年来,骏亚积累了世界范围内的众多知名品牌供应商,强大的技术品牌支撑,辐射多个国家和地区,品牌价值得到稳步提升,站在巨人肩膀上,让您无后顾之忧。

For years, Junya has gained a lot of supports from the well-known brand suppliers and customers. Stand on the shoulders of giants, so that you have no worries. The quality, technology and brand awareness of Junya are rising steadily.



管家服务-全程一体化服务网

Housekeeper service - Integration service network

我们将科学系统的研发力量转化为玻璃清洗系统定制方案,不断将细致的服务传递给每一位客户。针对玻璃清洗用户要求,骏亚组建起了全程一体化的服务体系网、技术团队以及售后服务人员,为每一位客户提供专业、贴心、迅捷的服务,尽短的时间内解决您遇到的相关问题,做您的随身管家。

Thousands of machines designed, produced and installed, the experience and production are our guarantee of reliability and quality. We provide technical expertise, training, and remote as well as on-site service to help maximize the value of the investments our customers have made.

2011 th

第22届展览会



2012 th

第23届展览会



2013 th

第24届展览会



2014 th

第25届展览会



中国国际玻璃工业技术展览会

CHINA INTERNATIONAL GLASS INDUSTRIAL TECHNICAL EXHIBITION

2015 th

第26届展览会



2016 th

第27届展览会



2017 th

第28届展览会



2018 th

第29届展览会



2019 th

第30届展览会




勃发 光荣与梦想一起飞翔

Junya Is Thriving Flies with honor and dream

高速节能清洗机系列（高配）

HIGH SPEED ENERGY-EFFICIENT
GLASS WASHING MACHINE SERIES (HIGH CONFIGURATION)

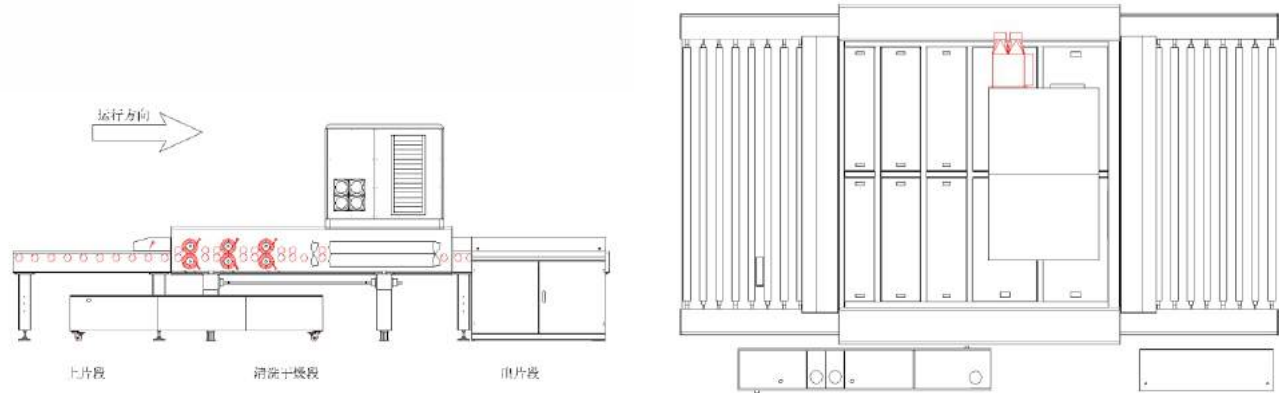

技术参数 Technical Parameters

序号	标识名称 Description	Model	JYX-3000CGT	JYX-2500CGT	JYX-2000CGT	JYX-1700CGT	JYX-1300CGT
1	传动速度 Working Speed		0-7m/min	0-15m/min	0-15m/min	0-15m/min	0-15m/min
2	最大尺度 Max. Width		3100mm	2600mm	2100mm	1800mm	1400mm
3	最小尺寸 Min. Size		500X500mm	400X400mm	400x400mm	400x400mm	400x400mm
4	加工厚度 Thickness Range		3-25	3-25	3-25	3-25	3-25
5	总功率 Total Power		48	45	45	42	37
6	设备尺寸 Machine Size		6370X5000X2840	6270X4500X2840	6070X4000X2840	6070X3700X2840	5770X3300X2840
7	重量 Machine Weight		4940	3940	3320	2920	2320
8	日光灯检测灯 Light Inspection		●	●	●	●	●
9	气缸 Cylinder		●	●	●	●	●
10	电源 Power Supply		●	●	●	●	●
11	热风开关 Air Heater Switch		●	●	●	●	●
12	风机开关 Blower Switch		●	●	●	●	●
13	高度数字显示 Height Digital Display		数字显示 Digital Display	数字显示 Digital Display	数字显示 Digital Display	数字显示 Digital Display	数字显示 Digital Display
14	水热开关 Water Heater Switch		●	●	●	●	●
15	水泵开关 Water Pump Switch		●	●	●	●	●
16	毛刷 Brush Diameter		Φ170	Φ160	Φ160	Φ160	Φ160
17	最大行程 Max. Height Limit		350	350	350	350	350
18	胶辊尺寸 Rubber Roller Diameter		Φ75	Φ75	Φ75	Φ75	Φ75
19	传动变频 Speed Inverter		●	●	●	●	●
20	毛刷变频 Brush Inverter		●	●	●	●	●
21	风机变频 Blower Inverter		●	●	●	●	●
22	PLC 触屏 PLC Touch Screen		●	●	●	●	●
23	LOW-E 功能 LOW-E Function	LOW-E	●	●	●	●	●
24	工作水平高度 Working Height		900	900	900	900	900

产品特性



Product Characteristics

- 主传动为齿轮传动、变频调速、数字显示、清洗部毛刷辊转动分别由上、下两组电机独立驱动，皮带传动、变频调速，转动速度平稳、使用寿命更长。
 - 清洗部、风干部整体升降、最大升程为：350mm、便于清洗和保养。
 - 三对大毛刷配置、可洗LOW-E玻璃、普通镀膜和阳光镀膜玻璃。
 - 二对特制风刀配置、风力大、风干效果好、带加热系统。
 - 铝合金拼装式结构。
- Main drive is gear drive, inverter speed control and digital display. Brush rollers of washing section are drove by upper and lower motors with belts, which has smooth speed and long service life.
 - Washing section and drying section can be rose up max. to 350mm as a whole, which is convenient to wash and maintain.
 - The machine has three pairs of brushes, which can be used for washing LOW-E glass, ordinary coated and solar glass.
 - The machine has two pairs of air knife which has large wind and good drying effect with the air heating system.
 - The machine structure is aluminum alloy assembled structure.

● 表示有此配备 MEAN "YES" | ○ 表示选装配备 MEAN "OPTIONAL" | ✕ 表示无此配备 MEAN "NO"

高速节能清洗机系列（钢化前）

HIGH SPEED ENERGY-EFFICIENT
GLASS WASHING MACHINE SERIES (BEFORE TEMPERING)

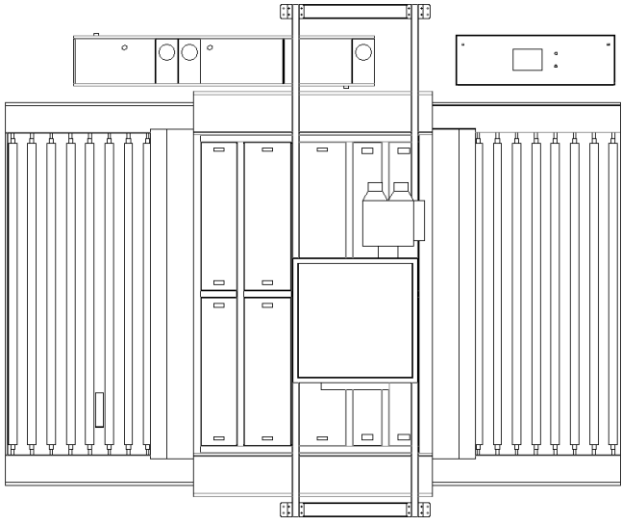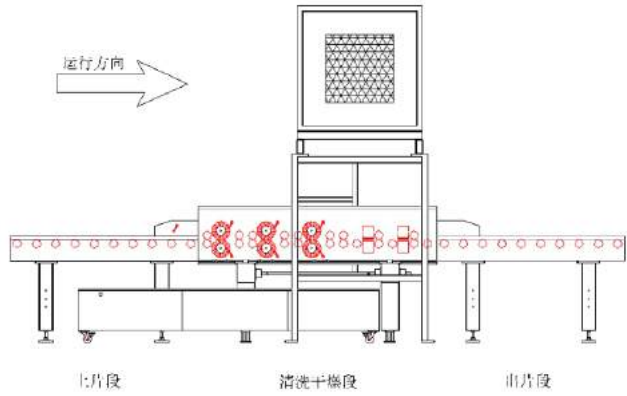

技术参数 Technical Parameters

序号	标识名称 Description	Model	JYX-3600C	JYX-3300C	JYX-3000C	JYX-2500C	JYX-2000C	JYX-1700C	JYX-1300C
1	传动速度 Working Speed		0-5m/min	0-7m/min	0-7m/min	0-12m/min	0-12m/min	0-12m/min	0-12m/min
2	最大尺度 Max. Width		3700mm	3400mm	3100mm	2600mm	2100mm	1800mm	1400mm
3	最小尺寸 Min. Size		500X500mm	500X500mm	500X500mm	400x400mm	400x400mm	400x400mm	400x400mm
4	加工厚度 Thickness Range		3-25mm	3-25mm	3-25mm	3-25mm	3-25mm	3-25mm	3-25mm
5	总功率 Total Power		45	38	38	35	35	32	27
6	设备尺寸 Machine Size		5500X5800X2840	5500X5400X2840	5500X5000X2840	5500X4500X2840	5500X4000X2840	5500X3700X2840	5500X3400X2840
7	重量 Machine Weight		4520	4220	4220	3840	3220	2820	2220
8	日光灯检测灯 Light Inspection		●	●	●	●	●	●	●
9	气缸 Cylinder		●	●	●	●	●	●	●
10	电源 Power Supply		●	●	●	●	●	●	●
11	热风开关 Air Heater Switch		●	●	●	●	●	●	●
12	风机开关 Blower Switch		●	●	●	●	●	●	●
13	高度数字显示 Height Digital Display		数字显示 Digital Display	数字显示 Digital Display	数字显示 Digital Display	数字显示 Digital Display	数字显示 Digital Display	数字显示 Digital Display	数字显示 Digital Display
14	水热开关 Water Heater Switch		○	○	○	○	○	○	○
15	水泵开关 Water Pump Switch		●	●	●	●	●	●	●
16	毛刷 Brush Diameter		Φ170	Φ170	Φ170	Φ160	Φ160	Φ160	Φ160
17	最大行程 Max. Height Limit		350	350	350	350	350	350	350
18	胶辊尺寸 Rubber Roller Diameter		Φ75	Φ75	Φ75	Φ75	Φ75	Φ75	Φ75
19	传动变频 Speed Inverter		●	●	●	●	●	●	●
20	毛刷变频 Brush Inverter		●	●	●	●	●	●	●
21	PLC 触屏 PLC Touch Screen		○	○	○	○	○	○	○
22	LOW-E 功能 LOW-E Function		●	●	●	●	●	●	●
23	工作水平高度 Working Height		900	900	900	900	900	900	900

产品特性

Product Characteristics

- 主传动为齿轮传动、变频调速、数字显示、清洗部毛刷辊分别由上、下两组电机独立驱动，皮带传动、变频调速，转动速度平稳、使用寿命更长。
- 清洗部、风干部整体升降、最大升程为350mm、便于清洗和保养。
- 三对大毛刷配置、可洗LOW-E玻璃、普通镀膜和阳光镀膜玻璃。
- 二对特制风刀配置、风力大、风干效果好、带加热系统。
- 铝合金拼装式结构。

- Main drive is gear drive, inverter speed control and digital display. Brush rollers of washing section are drove by upper and lower motors with belts, which has smooth speed and long service life.
- Washing section and drying section can be rose up max. to 350mm as a whole, which is convenient to wash and maintain.
- The machine has three pairs of brushes, which can be used for washing LOW-E glass, ordinary coated and solar glass.
- The machine has two pairs of air knife which has large wind and good drying effect with the air heating system.
- The machine structure is aluminum alloy assembled structure.


● 表示有此配备 MEAN "YES" | ○ 表示选装配备 MEAN "OPTIONAL" | ✕ 表示无此配备 MEAN "NO"

高速节能清洗机系列（磨边后）

HIGH SPEED ENERGY-EFFICIENT
GLASS WASHING MACHINE SERIES (AFTER GRINDING)



运行方向

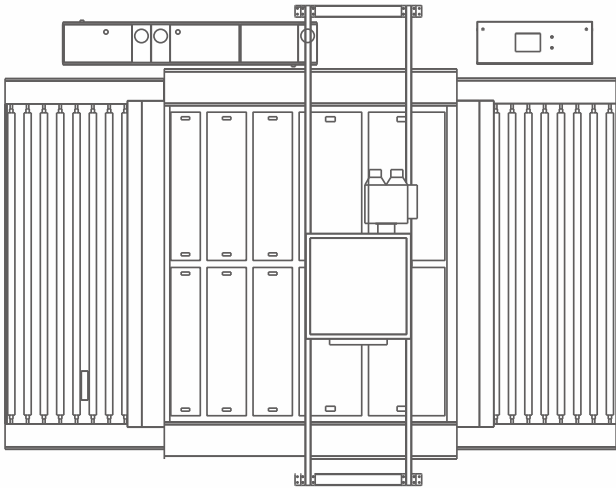

技术参数 Technical Parameters

序号	标识名称 Description	Model	JYX-3300CG	JYX-3000CG	JYX-2500CG	JYX-2000CG	JYX-1700CG	JYX-1300CG
1	传动速度 Working Speed		0-7m/min	0-7m/min	0-15m/min	0-15m/min	0-15m/min	0-15m/min
2	最大尺度 Max. Width		3400mm	3100mm	2600mm	2100mm	1800mm	1400mm
3	最小尺寸 Min. Size		500X500mm	500X500mm	400X400mm	400x400mm	400x400mm	400x400mm
4	加工厚度 Thickness Range		3-25	3-25	3-25	3-25	3-25	3-25
5	总功率 Total Power		45	45	35	35	32	27
6	设备尺寸 Machine Size		7230X5300X2840	6370X5000X2840	6270X4500X2840	6070X4000X2840	6070X3700X2840	5770X3300X2840
7	重量 Machine Weight		4820	4220	3840	3220	2820	2220
8	日光灯检测灯 Light Inspection		●	●	●	●	●	●
9	气缸 Cylinder		●	●	●	●	●	●
10	电源 Power Supply		●	●	●	●	●	●
11	热风开关 Air Heater Switch		●	●	●	●	●	●
12	风机开关 Blower Switch		●	●	●	●	●	●
13	高度数字显示 Height Digital Display		数字显示 Digital Display	数字显示 Digital Display	数字显示 Digital Display	数字显示 Digital Display	数字显示 Digital Display	数字显示 Digital Display
14	水热开关 Water Heater Switch		○	○	○	○	○	○
15	水泵开关 Water Pump Switch		●	●	●	●	●	●
16	毛刷 Brush Diameter		Φ170	Φ170	Φ160	Φ160	Φ160	Φ160
17	最大行程 Max. Height Limit		350	350	350	350	350	350
18	胶辊尺寸 Rubber Roller Diameter		Φ75	Φ75	Φ75	Φ75	Φ75	Φ75
19	传动变频 Speed Inverter		●	●	●	●	●	●
20	毛刷变频 Brush Inverter		●	●	●	●	●	●
21	风机变频 Blower Inverter		○	○	○	○	○	○
22	PLC 触屏 PLC Touch Screen		○	○	○	○	○	○
23	LOW-E 功能 LOW-E Function	LOW-E	●	●	●	●	●	●
24	工作水平高度 Working Height		900	900	900	900	900	900

产品特性


Product Characteristics

- 主传动为齿轮传动、变频调速、数字显示、清洗部毛刷辊转动分别由上、下两组电机独立驱动，皮带传动、变频调速，转动速度平稳、使用寿命更长。
 - 清洗部、风干部整体升降、最大升程为350mm、便于清洗和保养。
 - 三对大毛刷配置、可洗LOW-E玻璃、普通镀膜和阳光镀膜玻璃。
 - 二对特制风刀一直一斜配置、风力大、风干效果好、带加热系统。
 - 铝合金拼装式结构。
- Main drive is gear drive, inverter speed control and digital display. Brush rollers of washing section are drove by upper and lower motors with belts, which has smooth speed and long service life.
 - Washing section and drying section can be rose up max. to 350mm as a whole, which is convenient to wash and maintain.
 - The machine has three pairs of brushes, which can be used for washing LOW-E glass, ordinary coated and solar glass.
 - The machine has two pairs of air knife (one straight, one inclined), which has large wind and good drying effect with the air heating system.
 - The machine structure is aluminum alloy assembled structure.

● 表示有此配备 MEAN "YES" | ○ 表示选装配备 MEAN "OPTIONAL" | ✕ 表示无此配备 MEAN "NO"

镀膜、镀膜、喷绘前清洗机系列

GLASS WASHING MACHINE SERIES FOR GLASS BEFORE COATING,
MIRROR COATING AND PRINTING

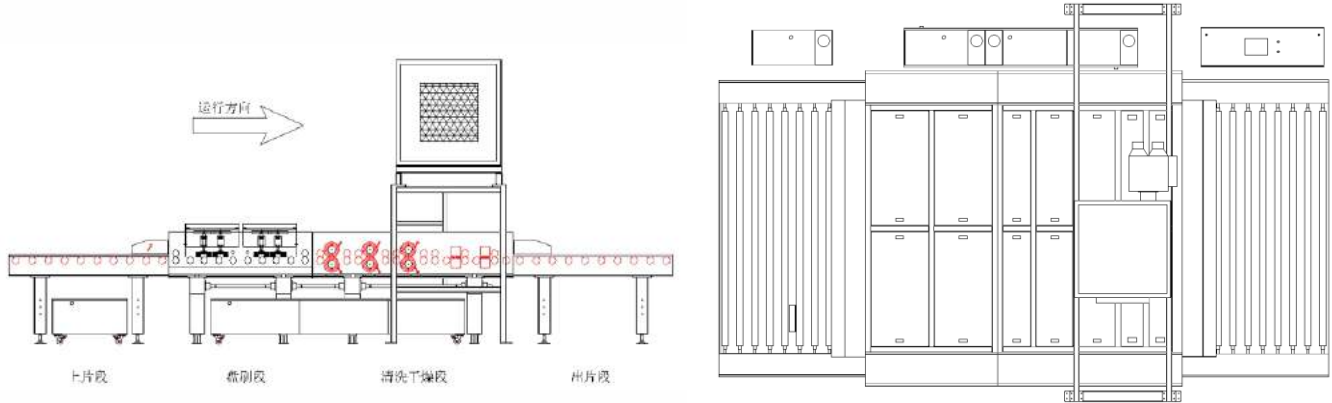

技术参数 Technical Parameters

序号	标识名称 Description	Model	JYX-3300CD	JYX-3000CD	JYX-2500CD	JYX-2000CD	JYX-1700CD	JYX-1300CD
1	传动速度 Working Speed		0-5m/min	0-5m/min	0-5m/min	0-5m/min	0-5m/min	0-5m/min
2	最大尺度 Max. Width		3400mm	3100mm	2600mm	2100mm	1800mm	1400mm
3	最小尺寸 Min. Size		500X500mm	500X500mm	500X500mm	500X500mm	500X500mm	500X500mm
4	加工厚度 Thickness Range		2-19	2-19	2-19	2-19	2-19	2-19
5	总功率 Total Power		55	55	45	45	42	37
6	设备尺寸 Machine Size		9370X5300X2840	8510X5000X2840	8410X4500X2840	8210X4000X2840	8210X3700X2840	7910X3300X2840
7	重量 Machine Weight		8500	7500	6500	5500	4500	3500
8	日光灯检测灯 Light Inspection		●	●	●	●	●	●
9	电源 Power Supply		●	●	●	●	●	●
10	热风开关 Air Heater Switch		●	●	●	●	●	●
11	风机开关 Blower Switch		●	●	●	●	●	●
12	高度数字显示 Height Digital Display		数字显示 Digital Display	数字显示 Digital Display	数字显示 Digital Display	数字显示 Digital Display	数字显示 Digital Display	数字显示 Digital Display
13	水热开关 Water Heater Switch		○	○	○	○	○	○
14	水泵开关 Water Pump Switch		●	●	●	●	●	●
15	毛刷 Brush Diameter		Φ170	Φ170	Φ160	Φ160	Φ160	Φ160
16	最大行程 Max. Height Limit		350	350	350	350	350	350
17	胶辊尺寸 Rubber Roller Diameter		Φ75	Φ75	Φ75	Φ75	Φ75	Φ75
18	传动变频 Speed Inverter		●	●	●	●	●	●
19	毛刷变频 Brush Inverter		●	●	●	●	●	●
20	风机变频 Blower Inverter		●	●	●	●	●	●
21	PLC 触屏 PLC Touch Screen		●	●	●	●	●	●
22	盘刷变频 Disc brush frequency		●	●	●	●	●	●
23	盘刷 Disk Brush		●	●	●	●	●	●
24	过滤器 Water Filter		●	●	●	●	●	●
25	工作水平高度 Working Height		900	900	900	900	900	900


产品特性

Product Characteristics

- 玻璃清洗机采用卧式结构、用于平板玻璃的清洗与干燥；适用镀膜、镀膜前清洗玻璃。
 - 主要由进片段、盘刷段、清洗段、干燥段、出片段组成。
 - 主传动为轴传动、变频器调节速度。
 - 整机按四级清洗、三对毛刷、四个水箱设计、二组单面盘刷清洗 设计、配用高压力泵。
- Horizontal glass washing machine is used for flat glass, especially for glass before coating, mirror coating and printing.
 - The machine mainly consists of loading section, washing section, drying section and unloading section.
 - Main drive is gear drive and inverter speed control.
 - The machine is designed as four-step washing and equippedwith three pairs of brushes and four tanks. The machine also has two pairs of single side disk brushes and high pressure pump.

立式清洗机系列

VERTICAL GLASS WASHING MACHINE SERIES

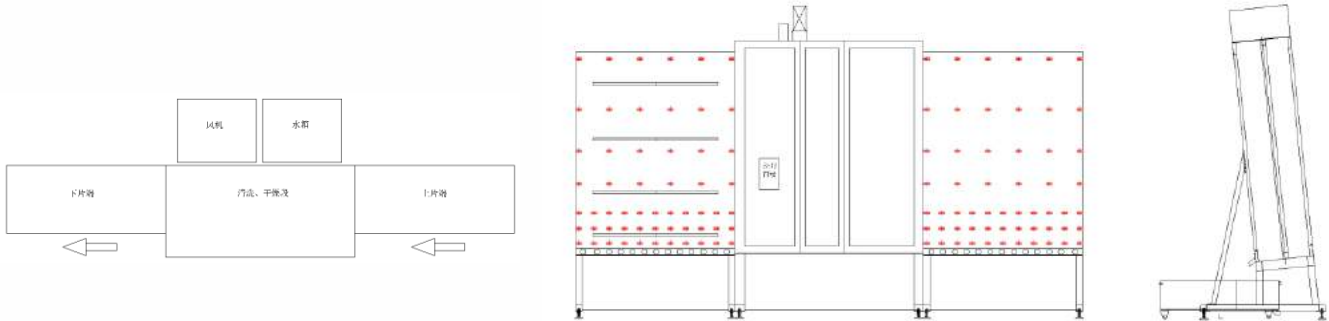

技术参数 Technical Parameters

序号	标识名称 Description	Model	JYX-2500L	JYX-2000L	JYX-1600L
1	传动速度 Working Speed		0-7m/min	0-7m/min	0-7m/min
2	最大尺度 Max. Width		2500mm	2000mm	1600mm
3	最小尺寸 Min. Size		500X300mm	500X300mm	500X300mm
4	加工厚度 Thickness Range		3-12	3-12	3-12
5	总功率 Total Power		27	23	22
6	设备尺寸 Machine Size		6400X2400X4200	6000X2000X3200	6000X2000X2800
7	重量 Machine Weight		3500	2500	2000
8	日光灯检测灯 Light Inspection		●	●	●
9	电源 Power Supply		●	●	●
10	热风开关 Air Heater Switch		●	●	●
11	风机开关 Blower Switch		●	●	●
12	水泵开关 Water Pump Switch		●	●	●
13	毛刷 Brush Diameter		Φ150	Φ150	Φ150
14	胶辊尺寸 Rubber Roller Diameter		Φ80	Φ75	Φ75
15	传动变频 Speed Inverter		●	●	●
16	PLC 触屏 PLC Touch Screen		○	○	○
17	LOW-E 功能 LOW-E Function	LOW-E	●	●	●
18	工作水平高度 Working Height		750	750	750

● 表示有此配备 MEAN "YES" | ○ 表示选装配备 MEAN "OPTIONAL" | ✕ 表示无此配备 MEAN "NO"

产品特性

Product Characteristics

- 立式玻璃清洗机是建筑、建材、装饰等行业生产加工中空玻璃的专用关键设备，适用于厚度3~12mm、平板玻璃的清洗。
 - 机主要由清洗箱、传动系统、机架、水箱、送风箱、电气控制等部分组成。整个清洗过程全自动完成，不需人工操作。
- Vertical glass washing machine is key equipment of manufacturing and processing insulating glass in architecture, building material and decoration industries. The machine can wash 3-12mm thickness flat glass.
 - The machine mainly consists of washing section, drying section, drive system, machine frame, tank, blower, electric control system and other parts. During the whole washing process, the machine works automatically, and no need manual operation.

清洗机简易风刀系列


GLASS WASHING MACHINE SIMPLE AIR
KNIFE TYPE SERIES



产品特性

Product Characteristics

- 风刀型玻璃清洗机采用卧式结构、用于平板玻璃的清洗与干燥。
- 主要由进片段、清洗段、出片段组成。
- 主传动为链条传动、无级调节速度。
- 整机按一级清洗、一个水箱设计、配用高压力泵。
- 四对毛刷、二对风刀配置。
- Simple air knife type horizontal glass washing machine is used for washing and drying flat glass.
- The machine mainly consists of loading section, washing section, drying section and unloading section.
- Main drive is chain drive and stepless speed regulation.
- The machine is designed as one-step washing and equipped with one water tank and high pressure pump.
- The machine has four pairs of brushes and two pairs of air knife.

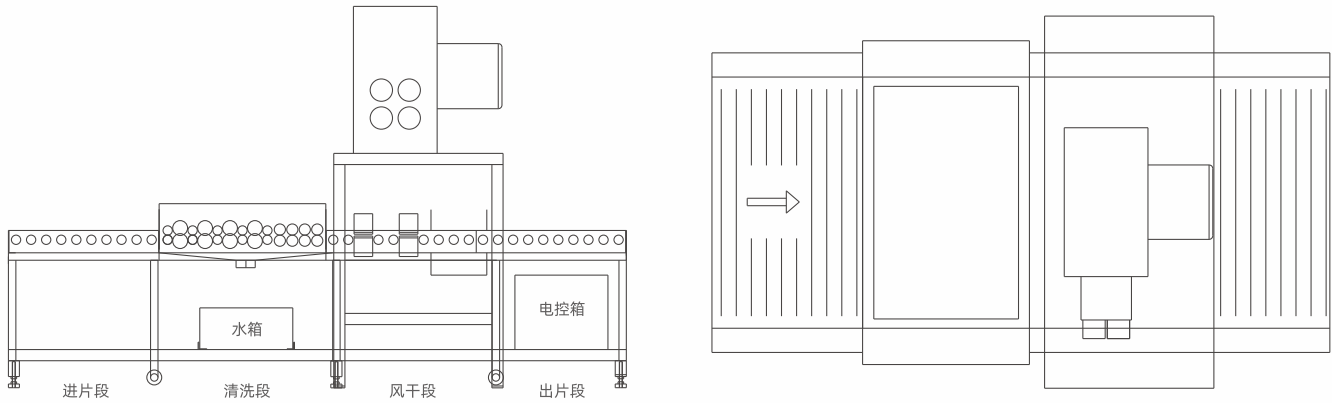


技术参数 Technical Parameters

序号	标识名称 Description	Model	JYX-1600CF	JYX-1200CF
1	传动速度 Working Speed		0-5m/min	0-5m/min
2	最大尺度 Max. Width		1600mm	1200mm
3	最小尺寸 Min. Size		400X400mm	400X400mm
4	加工厚度 Thickness Range		3-12	3-12
5	总功率 Total Power		23	18
6	设备尺寸 Machine Size		4100X2200X2300	3300X1800X2300
7	重量 Machine Weight		2000	1500
8	日光灯检测灯 Light Inspection		●	●
9	电源 Power Supply		●	●
10	热风开关 Air Heater Switch		●	●
11	风机开关 Blower Switch		●	●
12	水热开关 Water Heater Switch		○	○
13	水泵开关 Water Pump Switch		●	●
14	毛刷 Brush Diameter		Φ80	Φ80
15	胶辊尺寸 Rubber Roller Diameter		Φ50	Φ50
16	传动变频 Speed Inverter		无级变速 Stepless Regulation	无级变速 Stepless Regulation
17	工作水平高度 Working Height		830	830

● 表示有此配备
MEAN "YES" | ○ 表示选装配备
MEAN "OPTIONAL" | ✕ 表示无此配备
MEAN "NO"

丝印类清洗机系列（丝印前）

SCREEN PRINTING GLASS WASHING MACHINE SERIES
(BEFORE SCREEN PRINTING)

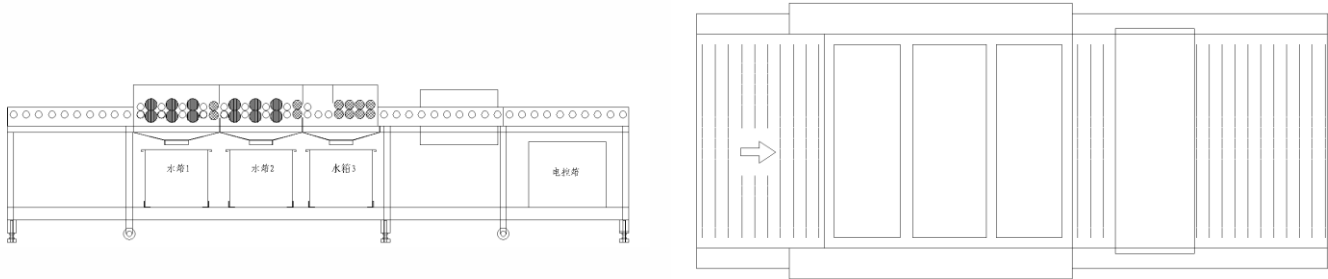

技术参数 Technical Parameters

序号	标识名称 Description	Model	JYX-1600C3	JYX-1200C3
1	传动速度 Working Speed		0-3.5m/min	0-3.5m/min
2	最大尺度 Max. Width		1600mm	1200mm
3	最小尺寸 Min. Size		200X200mm	150X150mm
4	加工厚度 Thickness Range		3-12	3-12
5	总功率 Total Power		19	14
6	设备尺寸 Machine Size		4660x2150x1100	3800x1750x1100
7	重量 Machine Weight		1800	1500
8	日光灯检测灯 Light Inspection		●	●
9	电源 Power Supply		●	●
10	热风开关 Air Heater Switch		●	●
11	风机开关 Blower Switch		●	●
12	水泵开关 Water Pump Switch		●	●
13	毛刷 Brush Diameter		Φ80	Φ80
14	胶辊尺寸 Rubber Roller Diameter		Φ50	Φ50
15	海绵辊 Sponge Roller		Φ70	Φ60
16	传动变频 Speed Inverter		●	●
17	工作水平高度 Working Height		830	830

● 表示有此配备
MEAN "YES" | ○ 表示选装配备
MEAN "OPTIONAL" | ✕ 表示无此配备
MEAN "NO"


产品特性

Product Characteristics

- 玻璃清洗机采用卧式结构、用于平板玻璃的清洗与干燥。
- 主要由进片段、清洗段、干燥段、出片段组成。
- 主传动为链条传动、变频调速。
- 整机按三级清洗、三个水箱设计、配用高压力泵。
- 六对毛刷、五对海绵辊配置。
- Horizontal glass washing machine is used for flat glass washing and drying.
- The machine mainly consists of loading section, washing section, drying section and unloading section.
- Main drive is chain drive and inverter speed control.
- The machine is designed as three-step washing and equipped with three water tanks and high pressure pump.
- The machine has six pairs of brushes and five pairs of sponge rollers.

丝印类清洗机系列（丝印后）

SCREEN PRINTING GLASS WASHING MACHINE SERIES
(AFTER SCREEN PRINTING)

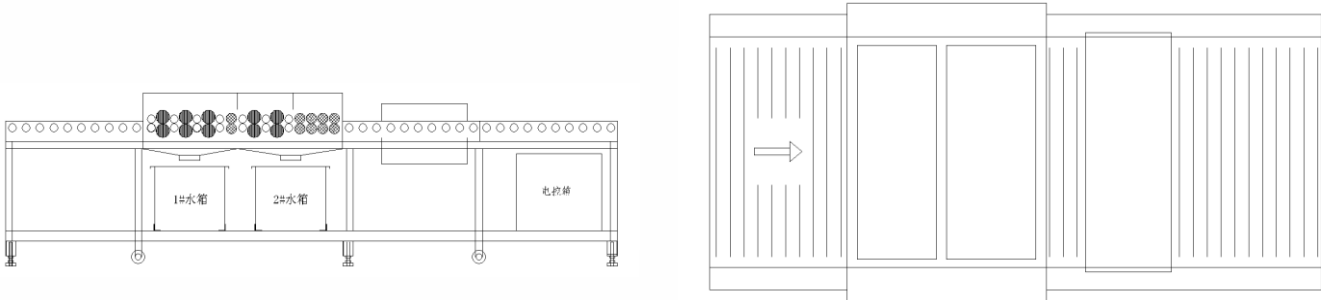

技术参数 Technical Parameters

序号	标识名称 Description	Model	JYX-1600C2	JYX-1200C2
1	传动速度 Working Speed		0-3.5m/min	0-3.5m/min
2	最大尺度 Max. Width		1600mm	1200mm
3	最小尺寸 Min. Size		200X200mm	150X150mm
4	加工厚度 Thickness Range		3-12	3-12
5	总功率 Total Power		19	14
6	设备尺寸 Machine Size		4260X2150X1100	3600x1750x1100
7	重量 Machine Weight		1100	900
8	日光灯检测灯 Light Inspection		●	●
9	电源 Power Supply		●	●
10	热风开关 Air Heater Switch		●	●
11	风机开关 Blower Switch		●	●
12	水泵开关 Water Pump Switch		●	●
13	毛刷 Brush Diameter		Φ80	Φ80
14	胶辊尺寸 Rubber Roller Diameter		Φ50	Φ50
15	海绵辊 Sponge Roller		Φ70	Φ60
16	传动变频 Speed Inverter		无级变速 Stepless Regulation	无级变速 Stepless Regulation
17	工作水平高度 Working Height		830	830

产品特性


Product Characteristics

- 玻璃清洗机采用卧式结构、用于平板玻璃的清洗与干燥。
 - 主要由进片段、清洗段、干燥段、出片段组成。
 - 主传动为链条传动、无级调节速度。
 - 整机按二级清洗、二个水箱设计、配用高压力泵。
 - 五对毛刷、四对海绵辊配置。
- Horizontal glass washing machine is used for flat glass washingand drying.
 - The machine mainly consists of loading section, washing section, drying section and unloading section.
 - Main drive is chain drive and stepless speed regulation.
 - The machine is designed as two-step washing and equipped with two water tanks and high pressure pump.
 - The machine has five pairs of brushes and four pairs of sponge rollers.

● 表示有此配备 MEAN"YES" | ○ 表示选装配备 MEAN"OPTIONAL" | ✕ 表示无此配备 MEAN "NO"

建筑、家私、包装清洗机系列

ARCHITECTURE / FURNITURE / PACKING GLASS WASHING MACHINE SERIES

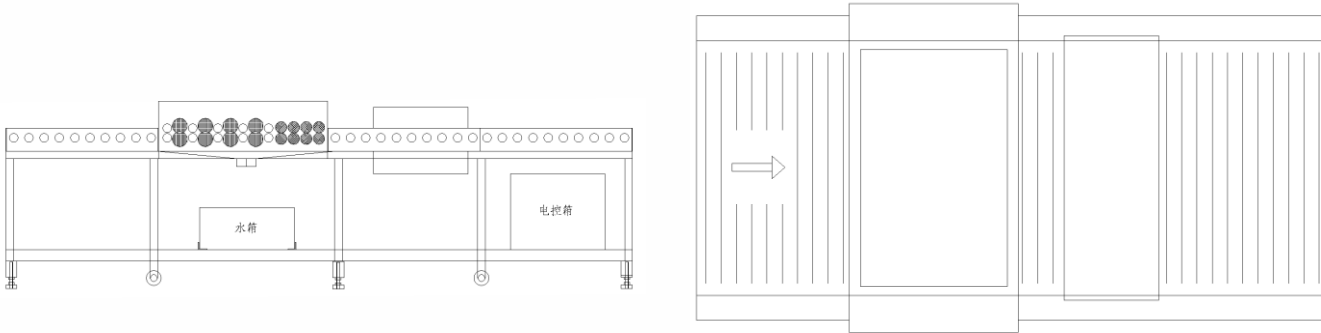

技术参数 Technical Parameters

序号	标识名称 Description	Model	JYX-1600C	JYX-1200C	JYX-1200CZ
1	传动速度 Working Speed		0-3.5m/min	0-3.5m/min	0-3.5m/min
2	最大尺度 Max. Width		1600mm	1200mm	1200mm
3	最小尺寸 Min. Size		200X200mm	150X150mm	70X70mm
4	加工厚度 Thickness Range		3-12	3-12	3-12
5	总功率 Total Power		19	14	14
6	设备尺寸 Machine Size		4000X2150X1000	3300X1750X1100	3300X1750X1100
7	重量 Machine Weight		1000	800	800
8	日光灯检测灯 Light Inspection		●	●	×
9	电源 Power Supply		●	●	●
10	热风开关 Air Heater Switch		●	●	●
11	风机开关 Blower Switch		●	●	●
12	水泵开关 Water Pump Switch		●	●	●
13	毛刷 Brush Diameter		Φ80	Φ80	Φ60
14	胶辊尺寸 Rubber Roller Diameter		Φ50	Φ50	Φ50
15	海绵辊 Sponge Roller		Φ70	Φ60	Φ60
16	传动变频 Speed Inverter		无级变速 Stepless Regulation	无级变速 Stepless Regulation	无级变速 Stepless Regulation
17	工作水平高度 Working Height		830	830	830


● 表示有此配备 MEAN "YES" | ○ 表示选装配备 MEAN "OPTIONAL" | × 表示无此配备 MEAN "NO"

产品特性 Product Characteristics

- 玻璃清洗机采用卧式结构、用于平板玻璃的清洗与干燥。
 - 主要由进片段、清洗段、干燥段、出片段组成。
 - 主传动为链条传动。
 - 四对毛刷、四对海绵辊、一个水箱配置。
- Horizontal glass washing machine is used for flat glass washing and drying.
 - The machine mainly consists of loading section, washing section, drying section and unloading section.
 - Main drive is chain drive.
 - The machine has four pairs of brushes, four pairs of sponge rollers and one tank.

灯饰、工艺、清洗机系列

LIGHTING / ART GLASS WASHING MACHINE SERIES

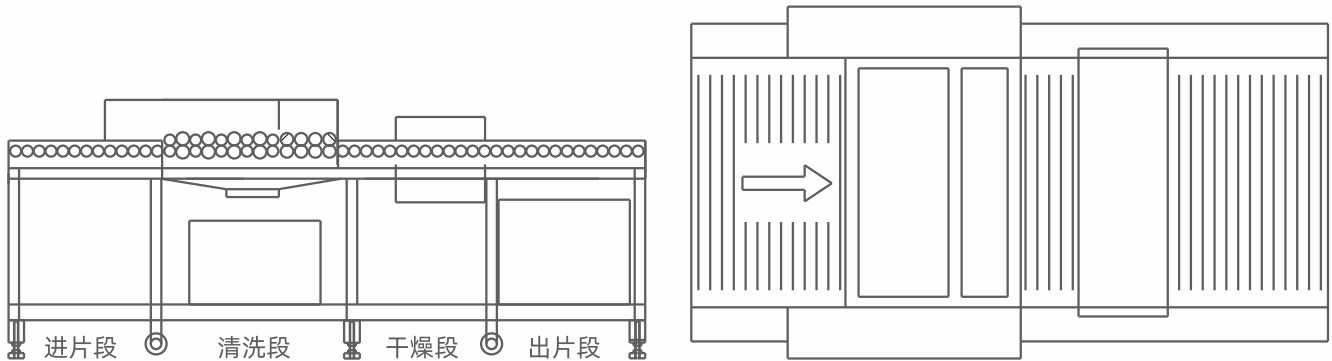

技术参数 Technical Parameters

序号	标识名称 Description	Model	JYX-800CS	JYX-800CS2	JYX-800CS3
1	传动速度 Working Speed		0-3.5m/min	0-3.5m/min	0-3.5m/min
2	最大尺度 Max. Width		800mm	800mm	800mm
3	最小尺寸 Min. Size		50x50mm	50x50mm	50x50mm
4	加工厚度 Thickness Range		3-6	3-6	3-6
5	总功率 Total Power		10	11	11
6	设备尺寸 Machine Size		2400X1350X1100	2600X1350X1100	2900X1350X1100
7	重量 Machine Weight		600	700	800
8	电源 Power Supply		●	●	●
9	热风开关 Air Heater Switch		●	●	●
10	风机开关 Blower Switch		●	●	●
11	水泵开关 Water Pump Switch		●	●	●
12	毛刷 Brush Diameter		Φ50	Φ50	Φ50
13	胶辊尺寸 Rubber Roller Diameter		Φ42	Φ42	Φ42
14	海绵辊 Sponge Roller		Φ48	Φ48	Φ48
15	传动变频 Speed Inverter		○	○	●
16	工作水平高度 Working Height		830	830	830

● 表示有此配备
MEAN "YES" | ○ 表示选装配备
MEAN "OPTIONAL" | ✕ 表示无此配备
MEAN "NO"


产品特性

Product Characteristics

- 玻璃清洗机采用卧式结构、用于平板玻璃的清洗与干燥。
- 主要由进片段、清洗段、干燥段、出片段组成。
- 四对毛刷、四对海绵辊、一个水箱配置。
- Horizontal glass washing machine is used for flat glass washing and drying.
- The machine mainly consists of loading section, washing section, drying section and unloading section.
- The machine has four pairs of brushes, four pairs of sponge rollers and one tank.

电子、家电清洗机系列

ELECTRONIC / HOME APPLIANCE GLASS WASHING MACHINE SERIES

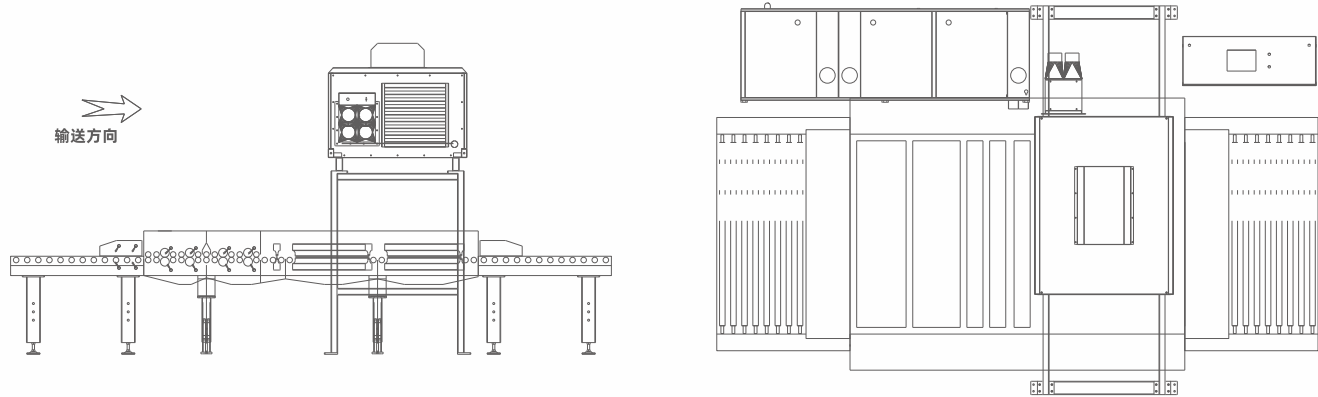

技术参数 Technical Parameters

序号	标识名称 Description	Model	JYX-1000CGS	JYX-1300CGS	JYX-1600CGS
1	传动速度 Working Speed		0-10m/min	0-10m/min	0-10m/min
2	最大尺度 Max. Width		1000	1300	1600
3	最小尺寸 Min. Size		200*200	200*200	200*200
4	加工厚度 Thickness Range		2-6MM	2-6MM	2-6MM
5	总功率 Total Power		37	41	45
6	设备尺寸 Machine Size		5000*2900*2840	5200*3200*2840	5400*3500*2840
7	重量 Machine Weight		2000	2300	2600
8	日光灯检测灯 Light Inspection		●	●	●
9	气缸 Cylinder		○	○	○
10	电源 Power Supply		●	●	●
11	热风开关 Air Heater Switch		●	●	●
12	风机开关 Blower Switch		●	●	●
13	高度数字显示 Height Digital Display		●	●	●
14	水热开关 Water Heater Switch		●	●	●
15	水泵开关 Water Pump Switch		●	●	●
16	毛刷 Brush Diameter		90	90	90
17	最大行程 Max. Height Limit		350	350	350
18	胶辊尺寸 Rubber Roller Diameter		50	50	50
19	传动变频 Speed Inverter		●	●	●
20	毛刷变频 Brush Inverter		●	●	●
21	风机变频 Blower Inverter		○	○	○
22	PLC 触屏 PLC Touch Screen		○	○	○
23	LOW-E 功能 LOW-E Function	LOW-E	○	○	○
24	工作水平高度 Working Height		900	900	900

产品特性


Product Characteristics

- 主传动为齿轮传动、变频调速、数字显示，清洗部毛刷辊转动分别由上下两组电机独立驱动、皮带传动、变频调速，转动速度平稳，使用寿命更长。
 - 清洗部、风干部整体升降，最大升程为350mm.便于清洗和保养。
 - 四对毛刷、三对风刀、三个水箱配置。
 - 铝合金拼装式结构。
- Main drive is gear drive, inverter speed control and digital display.Brush rollers of washing section are drove by upper and lower motors with belts, which has smooth speed and long service life.
 - Washing section and drying section can be rose up max. to 350mm as a whole, which is convenient to wash and maintain.
 - The machine has four pairs of brushes, four pairs of sponge rollers and three tanks.
 - The machine structure is aluminum alloy assembled structure.

● 表示有此配备
MEAN"YES" | ○ 表示选装配备
MEAN"OPTIONAL" | ✕ 表示无此配备
MEAN "NO"

光伏清洗机系列

SOLAR GLASS WASHING MACHINE SERIES

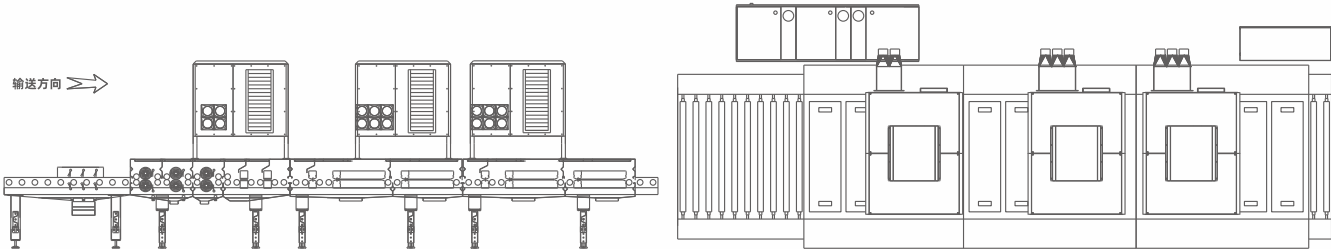

技术参数 Technical Parameters

序号	标识名称 Description	Model	JYX-1300CG40
1	传动速度 Working Speed		0-40m/min
2	最大尺度 Max. Width		1400
3	最小尺寸 Min. Size		400*400
4	加工厚度 Thickness Range		1.6-6
5	总功率 Total Power		80
6	设备尺寸 Machine Size		8600*3200*2980
7	重量 Machine Weight		5000
8	日光灯检测灯 Light Inspection		○
9	电源 Power Supply		●
10	热风开关 Air Heater Switch		●
11	风机开关 Blower Switch		●
12	高度数字显示 Height Digital Display		●
13	水热开关 Water Heater Switch		○
14	水泵开关 Water Pump Switch		●
15	毛刷 Brush Diameter		160
16	最大行程 Max. Height Limit		350
17	胶辊尺寸 Rubber Roller Diameter		75
18	传动变频 Speed Inverter		●
19	毛刷变频 Brush Inverter		●
20	风机变频 Blower Inverter		○
21	PLC 触屏 PLC Touch Screen		●
22	工作水平高度 Working Height		900

产品特性

Product Characteristics

- 主传动为齿轮传动、变频调速、数字显示、清洗部毛刷辊转动分别由上、下两组电机独立驱动，皮带传动、变频调速，转动速度平稳、使用寿命更长。
 - 清洗部、风干部整体升降、最大升程为350mm、便于清洗和保养。
 - 八对风刀，最高速度达40米/分钟。
 - 铝合金拼装式结构。
- Main drive is gear drive, inverter speed control and digital display. Brush rollers of washing section are drove by upper and lower motors with belts, which has smooth speed and long service life.
 - Washing section and drying section can be rose up max. to 350mm as a whole, which is convenient to wash and maintain.
 - Eight pairs of air knives with a maximum speed of 40m/min.
 - The machine structure is aluminum alloy assembled structure.

● 表示有此配备 MEAN "YES" | ○ 表示选装配备 MEAN "OPTIONAL" | ✕ 表示无此配备 MEAN "NO"

电子、家电清洗机系列

ELECTRONIC / HOME ELECTRICAL APPLIANCES
GLASS WASHING MACHINE SERIES



产品特性

Product Characteristics

- 玻璃清洗机采用卧式结构、用于平板玻璃的清洗与干燥。
 - 主要由进片段、清洗段、干燥段、出片段组成。
 - 主传动为轴传动、变频调速。
 - 四对毛刷、二对风刀、三个水箱配置。
- The horizontal glass washing machine is used for flat glass washing and drying.
 - The machine mainly consists of loading section, washing section, drying section and unloading section.
 - Main drive is gear drive and inverter speed control.
 - The machine has four pairs of brushes, two pairs of air knives, and three water tanks.


技术参数 Technical Parameters

序号	标识名称 Description	Model	JYX-800CE	JYX-1200CE	JYX-1600CE	序号	标识名称 Description	Model	JYX-800CE	JYX-1200CE	JYX-1600CE
1	传动速度 Working Speed		0-5m/min	0-5m/min	0-5m/min	10	热风开关 Air Heater Switch		●	●	●
2	最大尺度 Max. Width		800mm	1200mm	1600mm	11	风机开关 Blower Switch		●	●	●
3	最小尺寸 Min. Size		200X200mm	200X200mm	200x200mm	12	水泵开关 Water Pump Switch		●	●	●
4	加工厚度 Thickness Range		3-6	3-6	3-6	13	毛刷 Brush Diameter		Φ80	Φ80	Φ80
5	总功率 Total Power		31	33	35	14	胶辊尺寸 Rubber Roller Diameter		Φ50	Φ50	Φ50
6	设备尺寸 Machine Size		3800X2000X1200	4300X2400X1200	4500X2800X1200	15	传动变频 Speed Inverter		●	●	●
7	重量 Machine Weight		1200	1500	1800	16	毛刷变频 Brush Inverter		●	●	●
8	日光灯检测灯 Light Inspection		●	●	●	17	过滤器 Water Filter		●	●	●
9	电源 Power Supply		●	●	●	18	工作水平高度 Working Height		900	900	900

● 表示有此配备 MEAN"YES" | ○ 表示选装配备 MEAN"OPTIONAL" | ✕ 表示无此配备 MEAN "NO"

酸碱清洗机

ACID OR ALKALI GLASS WASHING MACHINE

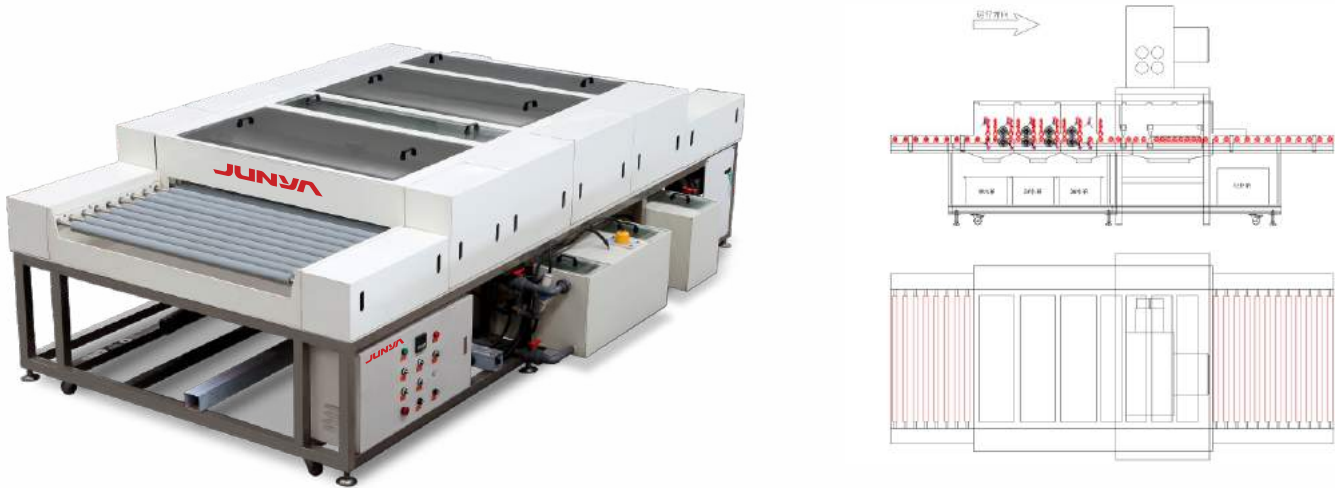

产品特性

Product Characteristics

- 玻璃清洗机采用卧式结构、用于平板玻璃的清洗与干燥。
 - 主要由进片段、清洗段、干燥段、出片段组成。
 - 主传动为轴传动、变频调速。
 - 四对毛刷、二对风刀、三个水箱配置。
- Horizontal glass washing machine is used for flat glass washing and drying.
 - The machine mainly consists of loading section, washing section, drying section and unloading section.
 - Main drive is gear drive and inverter speed control.
 - The machine has four pairs of brushes, two pairs of air knives, and three water tanks.

技术参数 Technical Parameters

序号	标识名称 Description	Model	JYX-800D	JYX-1200D	JYX-1600D	序号	标识名称 Description	Model	JYX-800D	JYX-1200D	JYX-1600D
1	传动速度 Working Speed		0-5m/min	0-5m/min	0-5m/min	10	热风开关 Air Heater Switch		●	●	●
2	最大尺度 Max. Width		800mm	1200mm	1600mm	11	风机开关 Blower Switch		●	●	●
3	最小尺寸 Min. Size		250X250mm	250X250mm	250X250mm	12	水泵开关 Water Pump Switch		●	●	●
4	加工厚度 Thickness Range		3-6	3-6	3-6	13	毛刷 Brush Diameter		Φ80	Φ80	Φ80
5	总功率 Total Power		31	33	35	14	胶辊尺寸 Rubber Roller Diameter		Φ50	Φ50	Φ50
6	设备尺寸 Machine Size		4200X1900X1200	4200X2400X1200	4200X2800X1200	15	传动变频 Speed Inverter		●	●	●
7	重量 Machine Weight		1200	1500	1800	16	毛刷变频 Brush Inverter		●	●	●
8	日光灯检测灯 Light Inspection		●	●	●	17	过滤器 Water Filter		●	●	●
9	电源 Power Supply		●	●	●	18	工作水平高度 Working Height		900	900	900

● 表示有此配备 MEAN"YES" | ○ 表示选装配备 MEAN"OPTIONAL" | ✕ 表示无此配备 MEAN "NO"

TFT玻璃清洗机系列

TFT GLASS WASHING MACHINE



TFT-G4.5 镀膜前清洗机

Glass Washing Machine before Coating

清洗规格	基板厚度(mm)	输送速度(M/Min)	功率(kw)	耗水量L/Min	设备结构	输送间距(mm)	输送高度(mm)
Glass Size Range	Glass Thickness	Working Speed	Total Power	Water Consumption	Machine Structure	Distance Between Rollers	Working Height
730X920	0.25~1.1	1~6	30~50	20~40	PVC/SUS	50~70	950

TFT玻璃清洗机系列

TFT GLASS WASHING MACHINE



TFT-G5.5 蚀刻后清洗机

Acid-etched Glass Washing Machine

清洗规格	基板厚度(mm)	输送速度(M/Min)	功率(kw)	耗水量L/Min	设备结构	输送间距(mm)	输送高度(mm)
Glass Size Range	Glass Thickness	Working Speed	Total Power	Water Consumption	Machine Structure	Distance Between Rollers	Working Height
1100x1300	0.25~1.1	1~6	45~50	30~50	PVC/SUS	50~70	1000

TFT玻璃清洗机系列

TFT GLASS WASHING MACHINE



TFT-G6 抛光后清洗机
Polished Glass Washing Machine

清洗规格	基板厚度(mm)	输送速度(M/Min)	功率(kw)	耗水量L/Min	设备结构	输送间距(mm)	输送高度(mm)
Glass Size Range	Glass Thickness	Working Speed	Total Power	Water Consumption	Machine Structure	Distance Between Rollers	Working Height
1500~1850	0.25-1.1	1~6	50~75	40~60	PVC/SUS	50~80	1200

TFT/LCD玻璃清洗机系列

TFT / LCD GLASS WASHING MACHINE



TFT/LCD-G8 镀膜前清洗机
Glass Washing Machine before Coating

清洗规格	基板厚度(mm)	输送速度(M/Min)	功率(kw)	耗水量L/Min	设备结构	输送间距(mm)	输送高度(mm)
Glass Size Range	Glass Thickness	Working Speed	Total Power	Water Consumption	Machine Structure	Distance Between Rollers	Working Height
2200x2500	0.4-3	1~6	60~90	50~75	PVC/SUS	60~80	1300