


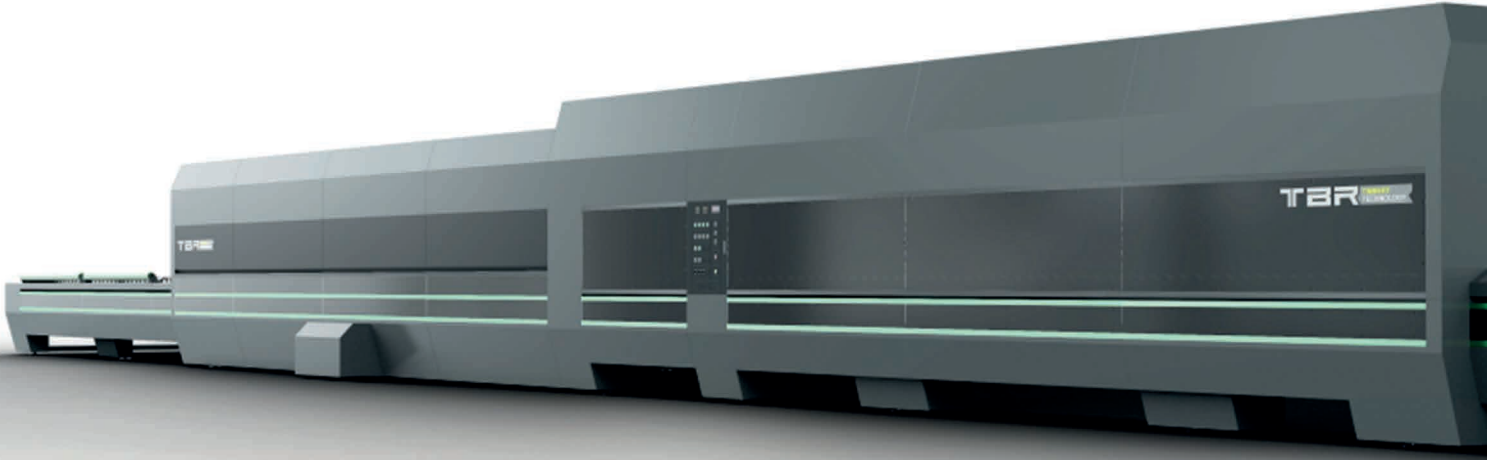


ARTIBİR MAKİNA TBR TEMPER ÜRÜN KATALOĞU

Artıbirmakina olarak Junya cam yıkama makinalarında sizlere çözüm odaklı gelişimler sunuyoruz.


0533 466 55 40

**Hemen
Bilgi Al**




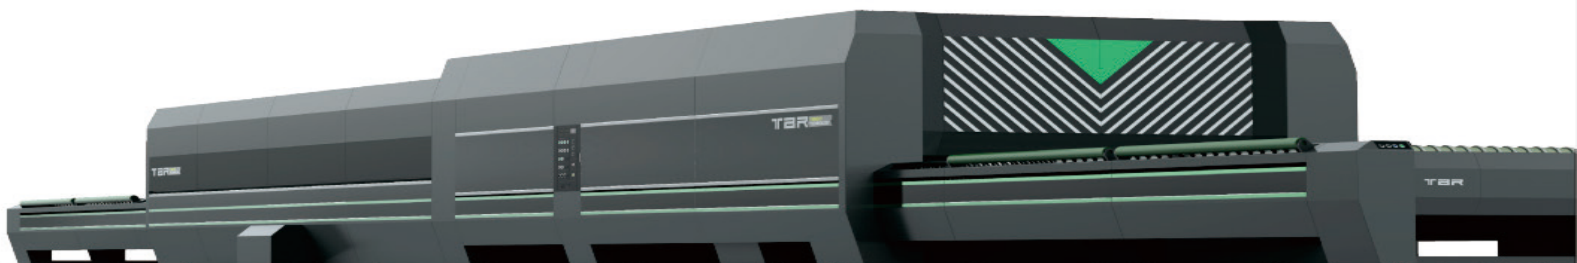


Radiation Flat Glass Tempering Furnace

Model	MAX	MIN		 m²/h	 KVA
BG1240	1250X4000	180X100	5-19	60	≥380
BG1550	1500X5000	250X100	5-19	88	≥580
BG2036	2000X3660	300X100	5-19	85	≥450
BG2050	2000X5000	300X100	5-19	124	≥600

Application: High grade instrumentation, electrical appliances, interiors decoration, solar glass, etc.


Model	MAX	MIN		 m²/h	 KVA
BG2436	2440X3660	300X100	5-19	110	≥500
BG2442	2440X4200	300X100	5-19	115	≥550
BG2450	2440X5000	300X100	5-19	142	≥630
BG2460	2440X6000	300X100	5-19	166	≥800
BG3080	3000X8000	350X200	5-19	268	≥1100
BG2850	2800X5000	230X150	5-19	170	≥700
BG2860	2800X6000	330X150	5-19	205	≥900
BG3380	3300X8000	350X200	5-19	320	≥1250

Application: furniture, decorative ,architecture, building laminatedglass, ect.

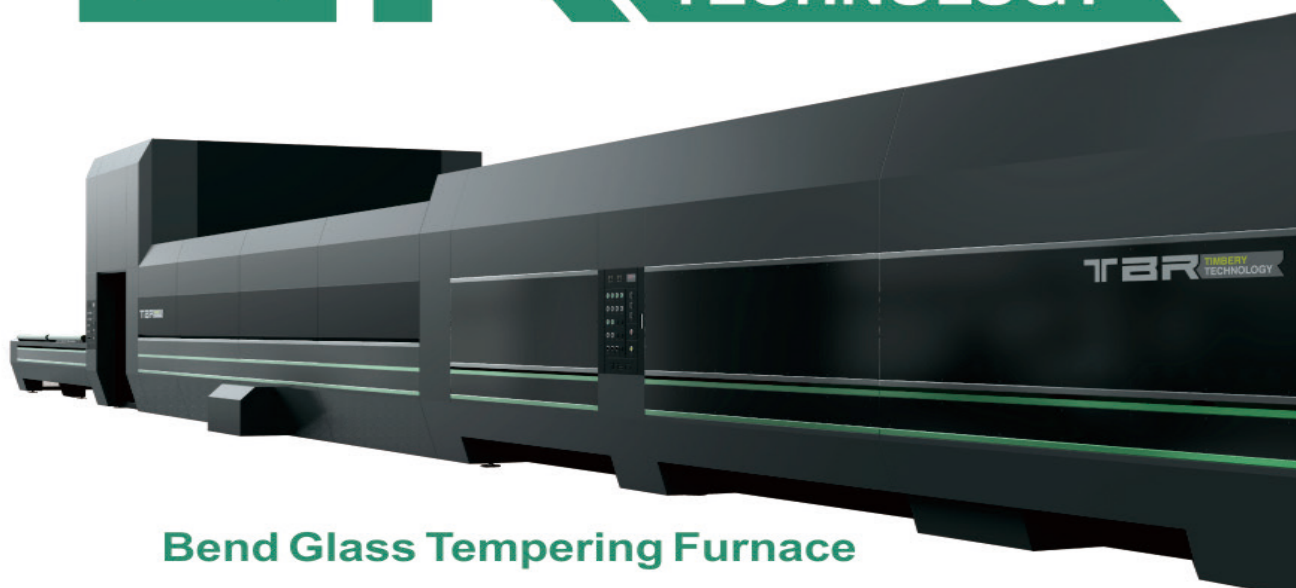


Bend Glass Tempering Furnace

Parameter of hard bending glass tempering furnace(WGH)



Model					 batch/h	
HW1210	1250×1000	350×350	3.2-8	500	45	≥400
HW2010	2000×1000	350×350	4-8	500	45	≥500
HW2415	2440×1500	400×400	5-19	650	30	≥630
HW2425	2440×2500	1000×1000	5-19	1500	14	≥350

Parameter of soft bending glass tempering furnace(WGZ)


Model					 batch/h	
ZW1220	1200×2000	1000×800	5-10	600	14	≥300
ZW2025	2000×2500	1000×1000	5-10	850	14	≥350
ZW2436	2400×3600	1000×800	6-12	1200	12	≥500
ZW2442	2400×4200	1000×1000	6-12	1200	12	≥550



Flat & Bend Glass Tempering Furnace

Model	Flat Glass				
	 MAX	 MIN		 m ² /h	
HWTG1225-10	1250×2550	250×100	2.85-12	38	
HWTG2042-10	2000×4200	300×100	4-19	100	
HWTG2436-15	2440×3660	350×200	4-19	110	
HWTG2436-25	2440×3660	350×200	4-19	110	
HWTG2030-10	2000×3000	300×100	4-19	75	
HWTG2036-10	2000×3660	300×100	4-19	90	
HWTG2442-15	2440×4200	300×100	4-19	128	
HWTG2442-15	2440×5000	300×100	4-19	150	
Bend Glass					Power KVA
 MAX	 MIN			 batch/h	
1250×1000	350×350	3.2-8	500	45	≥400
2000×1000	350×350	4-8	500	45	≥600
2440×1500	400×400	5-19	650	30	≥550
2440×2500	1000×1000	5-19	1500	14	≥550
2000×1000	350×350	5-19	500	30	≥450
2000×1000	350×350	5-19	500	30	≥500
2440×1500	400×400	5-19	650	30	≥600
2440×1500	400×400	5-19	650	30	≥630


Application: Furniture, shower glass, interior decorations, electrical appliance, architectural curve glass, automotive side window, etc.

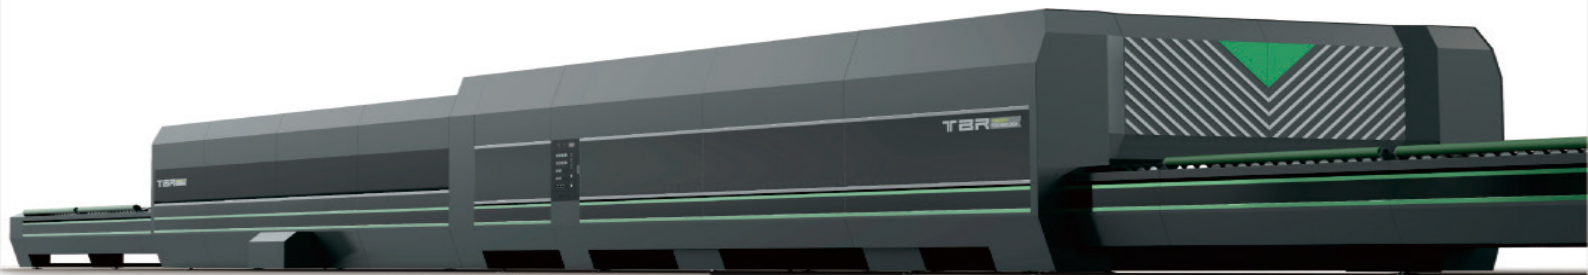

Convection Flat Glass Tempering Furnace With Pass Section

Model	↔ MAX	↔ MIN		 m²/h	 KVA
TG1525-A	1500X2500	300X100	2.85-19	57	≥450
TG1540-A	1500X4000	300X100	2.85-19	91	≥450
TG1550-A	1500X5000	300X100	2.85-19	114	≥580
TG2036-A	2000X3660	300X100	4-19	120	≥450
TG2050-A	2000X5000	300X100	4-19	144	≥600
TG2436-A	2440X3660	300X200	4-19	128	≥500
TG2442-A	2440X4200	300X200	4-19	147	≥550
TG2450-A	2440X5000	300X200	4-19	185	≥630
TG2460-A	2440X6000	300X200	4-19	210	≥800

Application: On-line, off-line single silver and double silver Low-E glass, high grade instrumentation, electrical appliances, interiors decoration, solar glass, furniture, decorative ,architecture, building laminated glass ,etc.

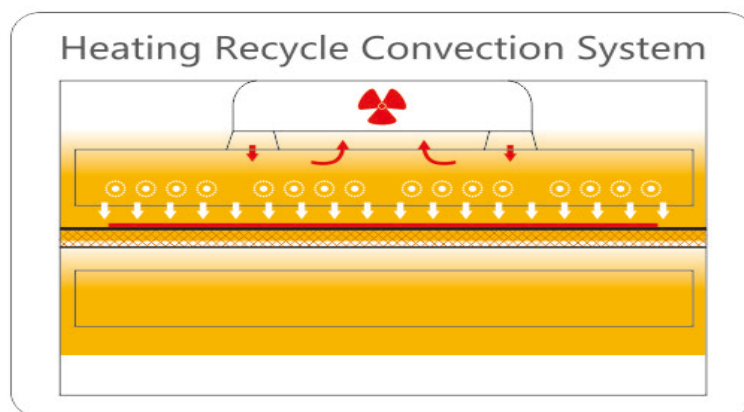


TBR TIMBER TECHNOLOGY

TBR TIMBER TECHNOLOGY






TBR TIMBER TECHNOLOGY

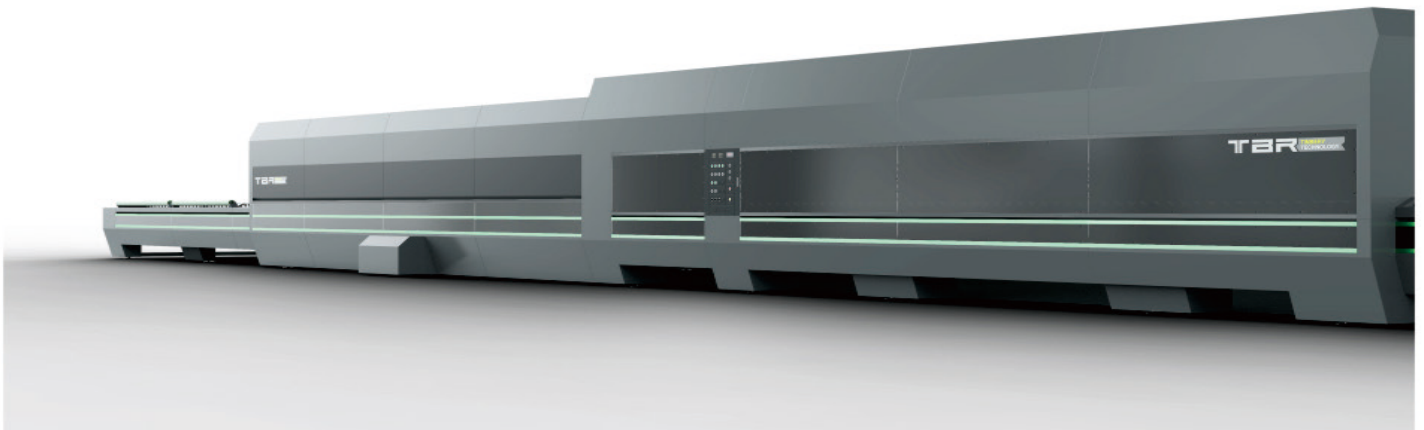


TBR TIMBER TECHNOLOGY



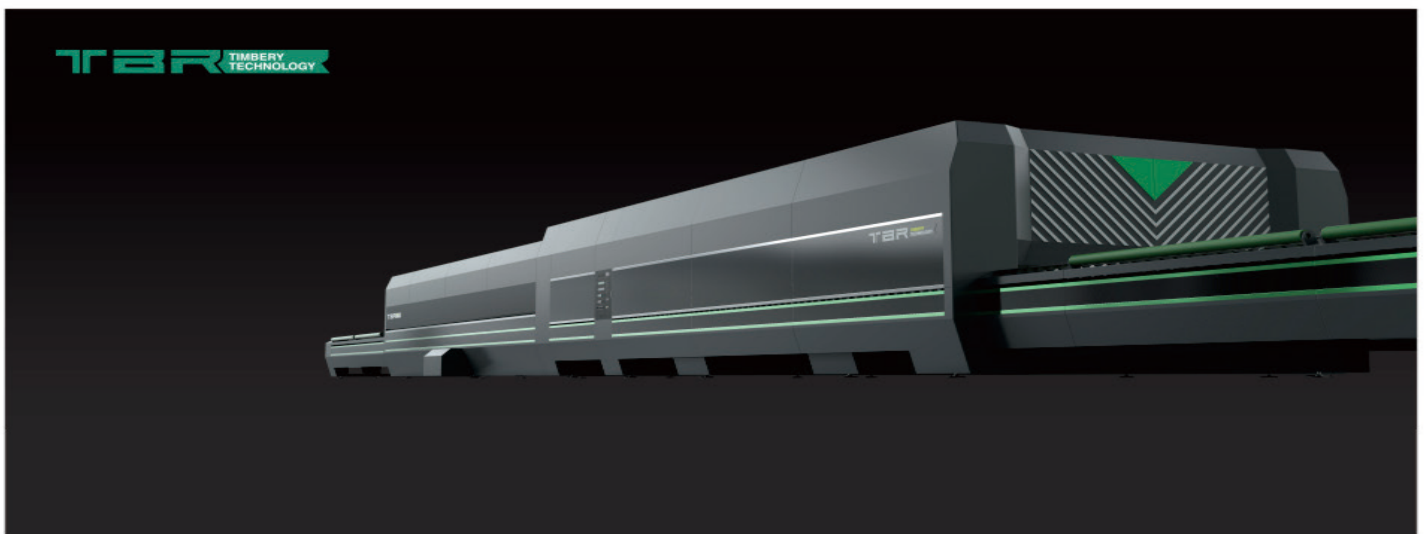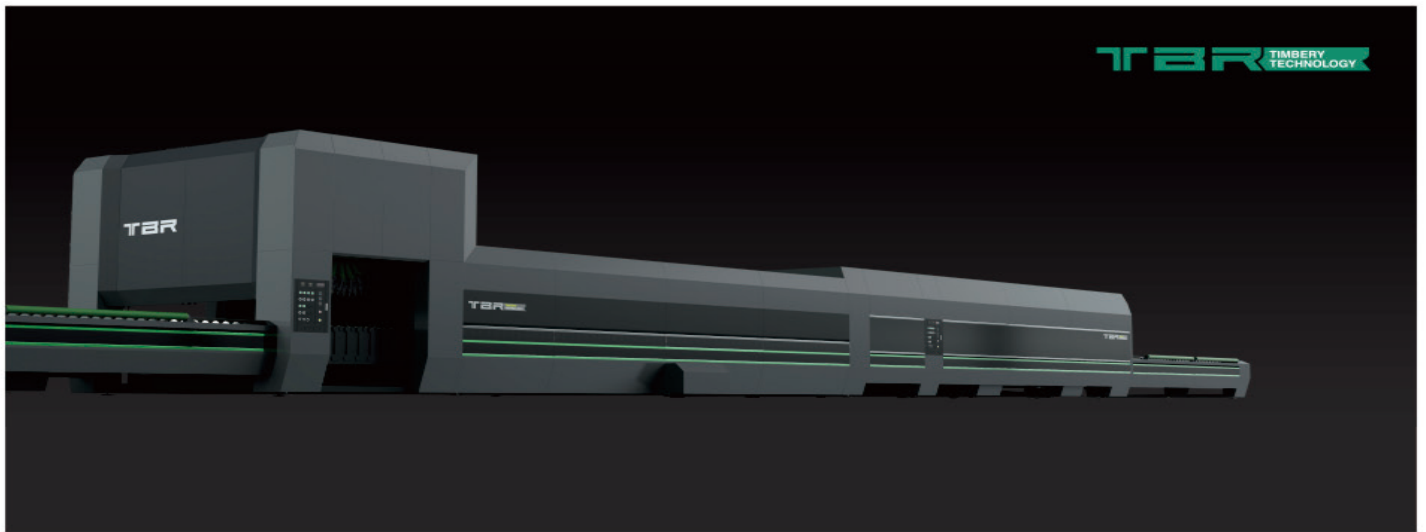


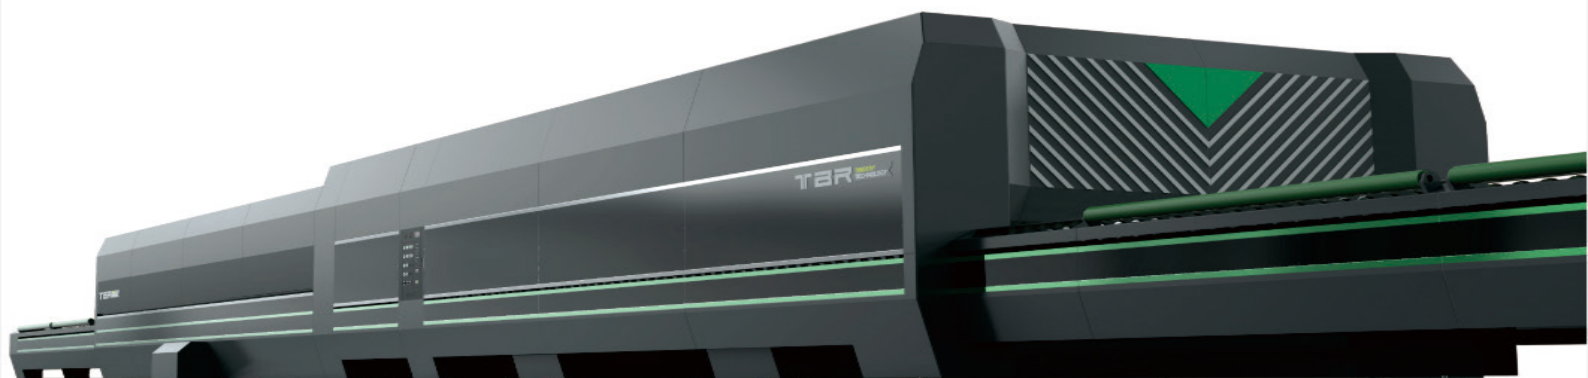

Radiation Flat Glass Tempering Furnace With Pass Section

Model	↔ MAX	↔ MIN		 m²/h	 KVA
TG0220	200X2000	40X40	2.85-8	6	≥70
TG0920	900X2000	130X50	2.85-12	26	≥200
TG1225	1250X2500	180X100	2.85-15	45	≥300
TG1550	1500X5000	230X100	2.85-19	102	≥580
TG2050	2000X5000	250X100	4-19	136	≥600
TG2436	2440X3660	300X200	4-19	114	≥500
TG2442	2440X4200	300X200	4-19	130	≥550
TG2450	2440X5000	300X200	4-19	156	≥630

High grade instrumentation, electrical appliances, interiors decoration, solar glass, furniture, decorative, architecture, building laminated glass ,etc.

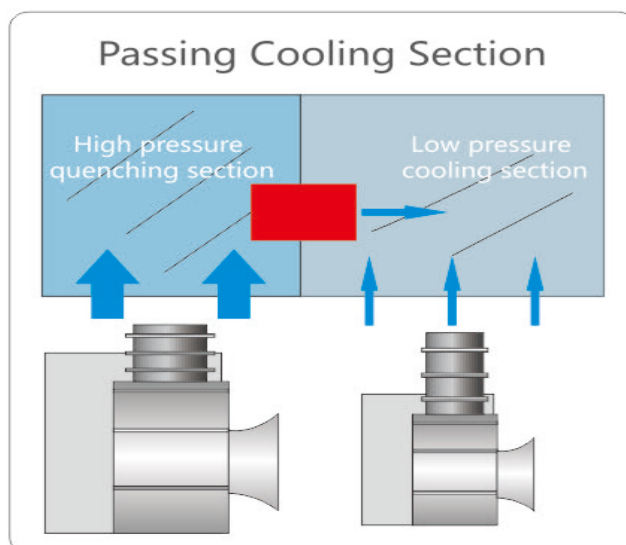

Bending glass furnace working performance

